

L32 Peristaltic Pump

www.enviroflexpumps.com | +44 (0) 1332 913 200 | sales@enviroflexpumps.com



PUMP SPECIFICATIONS

PUMP (HOSE) BORE

32mm (1-1/2")

MAX WORKING PRESSURE

10 BarG (145 PSI)

DISPLACEMENT PER REV

0.95 L/REV (0.251 US GAL/REV)

MAX CONTINUOUS SPEED

70 RPM

MAX INTERMITTENT SPEED

80 RPM

SOLIDS HANDLING

Soft: 25mm (1") Hard: 5mm (3/16")

MAX SUCTION LIFT (WATER)


9 Meters (27 Feet)

AVERAGE STANDARD WEIGHT

155 KG (341 LB)



L32 PERFORMANCE CURVE

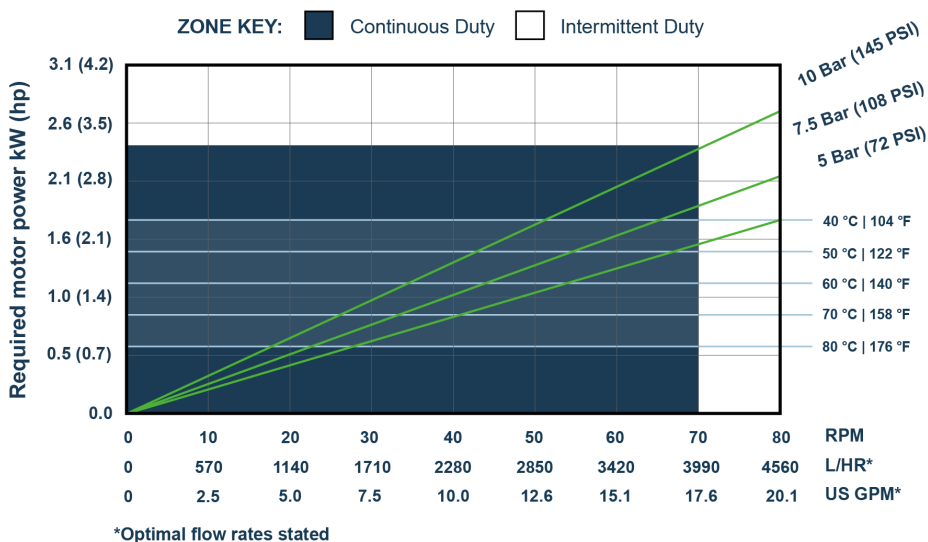

RUBBER HOSE MATERIALS

☐ Natural (NR)

☐ Food Grade Natural (FGNR)

☒ Nitrile Buna (NBR)

☒ Food Grade Nitrile Buna (FGNBR)

☒ Ethylene Propylene Diene Monomer (EDPM)


☒ Chlorosulfonated Polyethylene (CSM)

☒ Fluorine/Fluoro (FKM)

CONNECTION OPTIONS

- BSPT (standard)
- ANSI Class 150 Flanged
- PN16 Flanged
- Tri-Clamp*
- IDF
- RJT
- Camlock

GA DRAWING

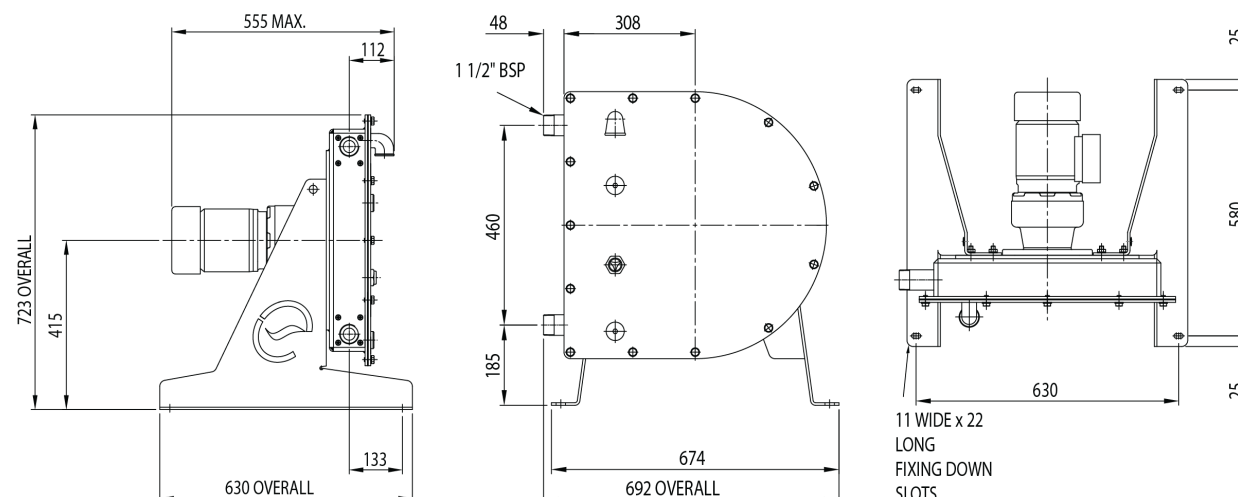

UK
CA