

L40 Peristaltic Pump

www.enviroflexpumps.com | +44 (0) 1332 913 200 | sales@enviroflexpumps.com



PUMP SPECIFICATIONS

PUMP (HOSE) BORE

40mm (1-1/2")

MAX WORKING PRESSURE

10 BarG (145 PSI)

DISPLACEMENT PER REV

1.82 L/REV (0.481 US GAL/REV)

MAX CONTINUOUS SPEED

60 RPM

MAX INTERMITTENT SPEED

90 RPM

SOLIDS HANDLING

Soft: 32mm (1-1/4") Hard: 6mm (1/4")

MAX SUCTION LIFT (WATER)


9 Meters (27 Feet)

AVERAGE STANDARD WEIGHT

250 KG (550 LB)



L40 PERFORMANCE CURVE

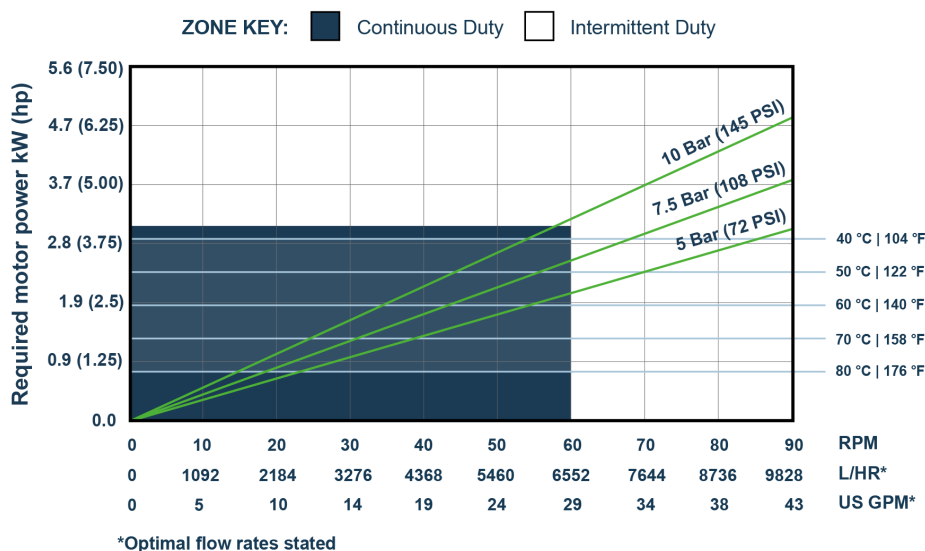

RUBBER HOSE MATERIALS

○ Natural (NR)

○ Food Grade Natural (FGNR)

● Nitrile Buna (NBR)

● Food Grade Nitrile Buna (FGNBR)

● Ethylene Propylene Diene Monomer (EDPM)


● Chlorosulfonated Polyethylene (CSM)

● Fluorine/Fluoro (FKM)

CONNECTION OPTIONS

- BSPT (standard)
- Tri-Clamp*
- ANSI Class 150
- IDF
- Flanged
- RJT
- PN16 Flanged
- Camlock

GA DRAWING

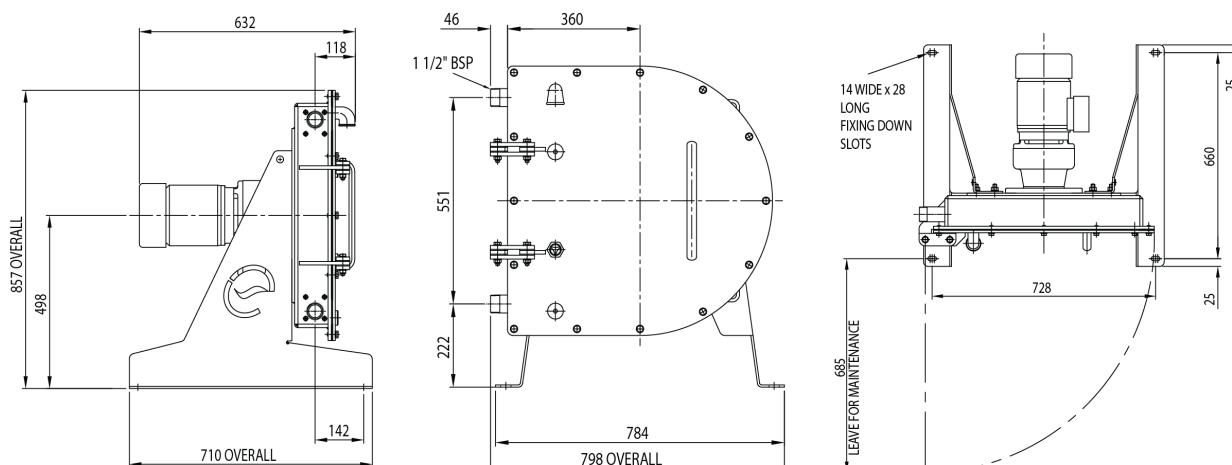

**UK
CA**