

L65 Peristaltic Pump

www.enviroflexpumps.com | +44 (0) 1332 913 200 | sales@enviroflexpumps.com



PUMP SPECIFICATIONS

- PUMP (HOSE) BORE
65mm (2 1/2")
- MAX WORKING PRESSURE
10 BarG (145 PSI)
- DISPLACEMENT PER REV
7.1 L/REV (1.876 US GAL/REV)
- MAX CONTINUOUS SPEED
45 RPM
- MAX INTERMITTENT SPEED
60 RPM
- SOLIDS HANDLING
Soft: 51mm (2") Hard: 10mm (3/8")
- MAX SUCTION LIFT (WATER)
9 Meters (27 Feet)
- AVERAGE STANDARD WEIGHT
375 KG (825 LB)



RUBBER HOSE MATERIALS

- Natural (NR)
- Food Grade Natural (FGNR)
- Nitrile Buna (NBR)
- Food Grade Nitrile Buna (FGNBR)
- Ethylene Propylene Diene Monomer (EDPM)
- Chlorosulfonated Polyethylene (CSM)
- Fluorine/Fluoro (FKM)


CONNECTION OPTIONS

- BSPT (standard)
- Tri-Clamp*
- ANSI Class 150
- IDF
- Flanged
- RJT
- PN16 Flanged
- Camlock

GA DRAWING

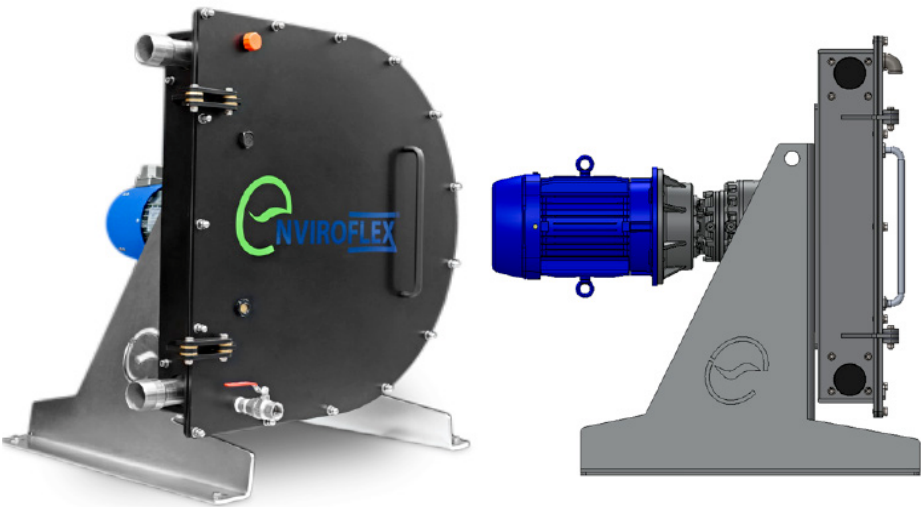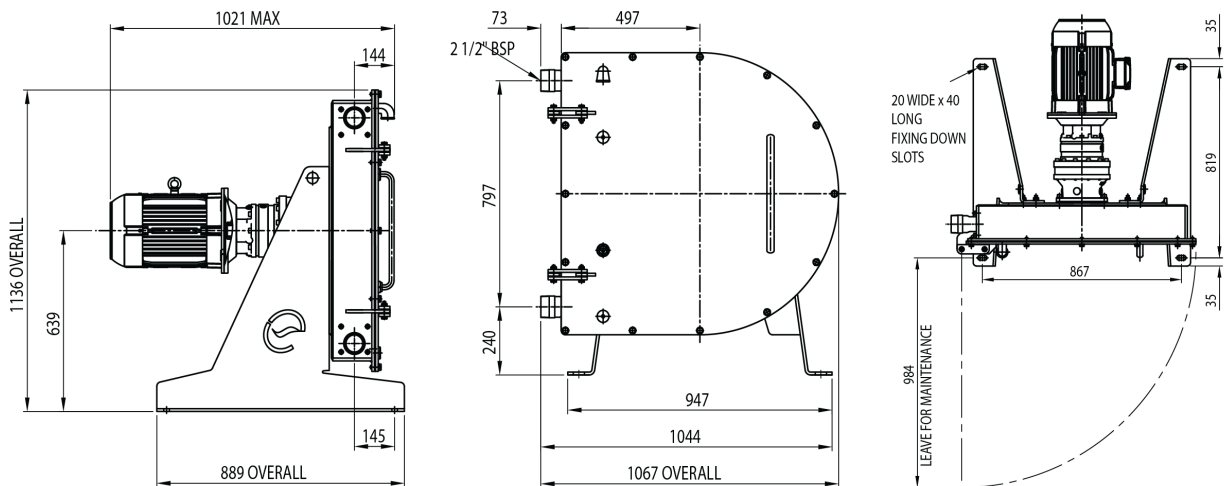

L65 PERFORMANCE CURVE

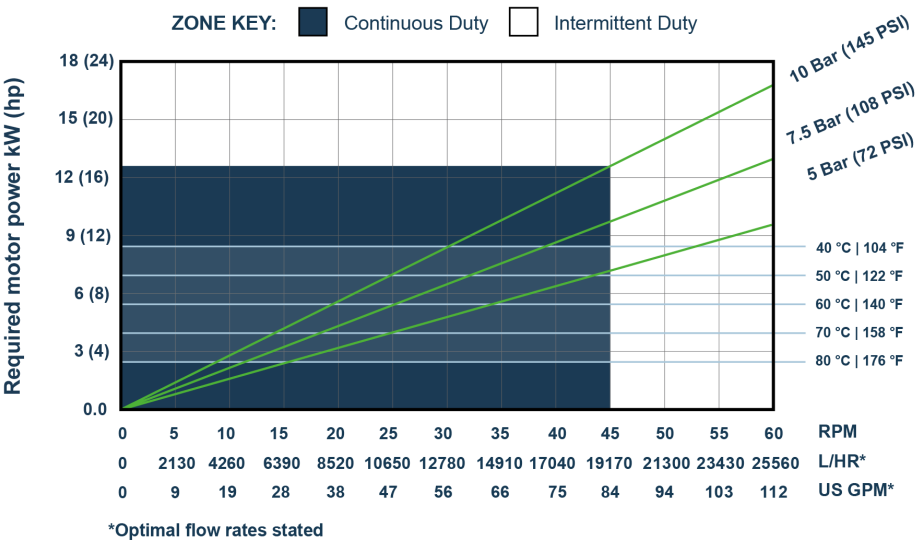

UK
CA